

# NSB 12-245RT *UPS Battery*

Designed for **mission critical applications**

A premium replacement for the 12-225FT



NorthStar's Pure Lead UPS batteries, ideal for use with datacenters and applications where **downtime is not an option.**

- Performance excels at high rates of discharge and recharge
- 15 year float life at 20°C (68°F)
- EUROBAT design life definition: Long Life (12+ years)
- High energy density
- Operating temperature range: -40°C to +65°C (-40°F to 149°F)
- State-of-the-art automated manufacturing ensures consistency and reliability
- Advanced 3 stage terminal design to ensure leak-free operation - female M8 brass terminals provide maximum performance
- 2 year shelf life at 25°C (77°F)
- High modulus Polyphenylene Oxide (PPO) plastic materials designed to withstand extended elevated operating temperatures and maintain high battery compression essential for reliable operation
  - Non-halogenated, thermally sealed plastic casing
  - Flame retardant (UL 94 V0) and LOI of at least 28%
- Pure lead, advanced valve regulated AGM batteries ensure power when it is needed most.
- Integral handles and front access terminals ensure ease of installation and maintenance
- Approved as non-hazardous cargo for ground, sea, and air transport - DOT 49CFR173.159(d), (i) and (ii)

Visit our website to find out more [www.northstarbattery.com](http://www.northstarbattery.com)



# NSB 12-245RT UPS Battery

## Nominal Technical Specifications



### Electrical

	International Standard 20°C (68°F)	North American Standard 25°C (77°F)
4C (15 min.) power to 1.67 VPC	233 Watts/Cell	248 Watts/Cell
Float Voltage	2.29 +/- 0.02 VPC	2.27 +/- 0.02 VPC
Impedance (1kHz)	4.8 mΩ @ 25°C (77°F)	
Conductance	965 S	
Nominal Voltage	12 V	
Short Circuit Current	2,100 A	
Shelf Life	2 years	

### Dimensions


Height	263 mm (10.4 in) 266 mm (10.5 in) with Front Terminal adapter	Weight	21 kg (45 lbs)
Width	108 mm (4.2 in)	Terminal	Female M8 x 1.25
Depth	287 mm (11.3 in)	Terminal Torque	8.0 Nm (71 in-lbs)

### Constant Power Discharge Ratings


Duration (minutes) (watts/cell @ 25 °C/77 °F)

End of discharge (Volts)	2	5	10	15	20	30	45	60	120
1.75	482	396	294	235	197	149	111	88	50
1.70	554	429	309	244	202	152	112	89	50
1.67	595	447	317	248	205	154	113	90	50
1.65	621	458	322	251	207	155	113	90	50
1.60	678	482	332	256	211	157	114	91	50

### Drawings

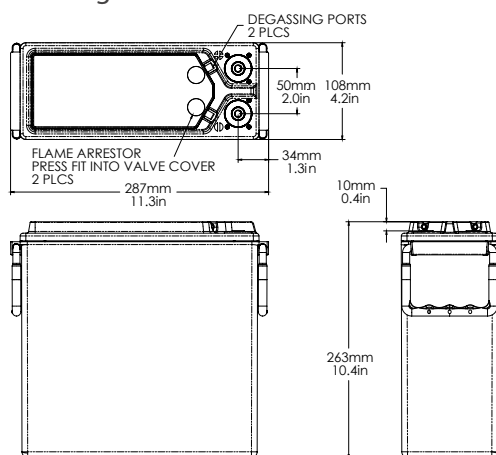

### Discharge Curve to 1.67 VPC

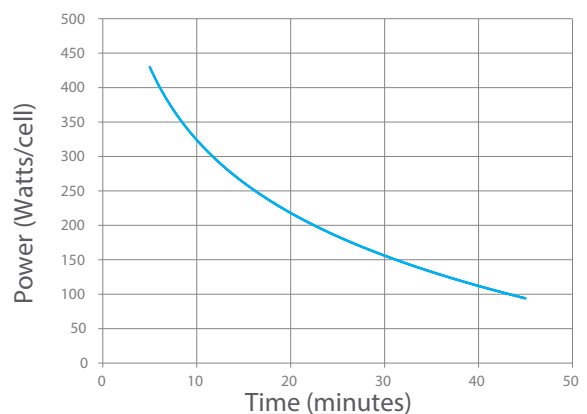

**NorthStar Americas**  
NorthStar Battery Company LLC  
4000 Continental Way  
Springfield, MO, 65803,  
United States of America  
info@northstarbattery.com  
Tel: +1 417 575 8200  
Fax: +1 417 575 8250

**NorthStar Europe**  
SiteTel Sweden AB  
Staffans Väg 6-8  
SE-192 07 Sollentuna,  
Stockholm, Sweden  
europe@northstarbattery.com  
Tel: +46 8 410 102 00  
Fax: +46 8 638 06 00

**NorthStar Middle East, Africa**  
SiteTel Sweden AB JTL Branch  
Office 702, Saba 1 Tower  
Jumeirah Lake Towers, Dubai  
United Arab Emirates  
mea@northstarbattery.com  
Tel: +971 4 423 8060  
Fax: +971 4 423 8061

**NorthStar Asia-Pacific**  
NS Asia Pacific Sdn. Bhd.  
Level 20, Menara Standard  
Chartered  
30 Jalan Sultan Ismail, 50250  
Kuala Lumpur, Malaysia  
asia@northstarsitetel.com  
Tel: +60 3 2117 5354

www.northstarbattery.com



Distribuidor Autorizado Tel. (81)8333 8788

email. informes@secovi.com

www.secovi.com

Form: SES-546-10 Issued: 01-20-14 ECO: 2398-S13